


Series 33 - Insulated Roller Shutter


Giving our customers piece of mind: Performance characteristics according to harmonised standards EN13241:2003 + A2: 2016


CUSTOMER NAME:	CUSTOMER ADDRESS	
DATE	POSTCODE	
CONTACT NUMBER:	CONTACT NAME:	
E-MAIL:	SITE REFERENCE:	

Face Fit:

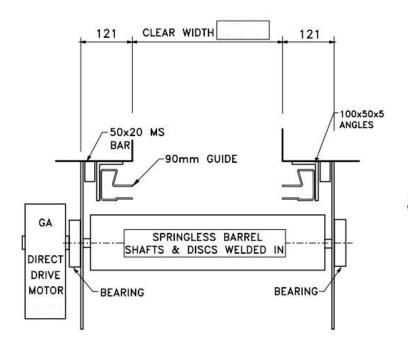

Reveal Fit:

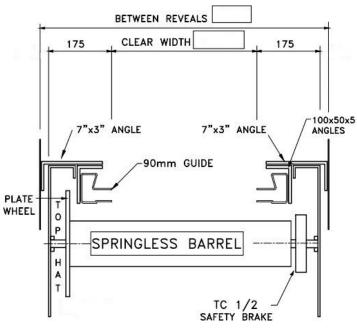



Measurements:

Back of Guide:

Back of Angle:

Between Reveals:

Side room available:

Left hand side:

Right hand side:





MOTOR		Left Hand ☐ 1ph ☐ Right Hand ☐ 3ph ☐			FIXING POSITION		Internal fix External Fix			
PLANT REQUIRED Scaffold 5m Scissor Lift Cherry Picker Generator Weder Genie Lift Chain Hoist Harness Puller Breaker Mixer Jig Saw Floor Cutter Special										
SPECIAL REQUIREMENTS Is sliding room available: Yes No										
CANOPY STYLE Motor Cover		L-Shaped	d Out No To		op Lip Top Li		o Down 🗆 L-	Shaped In	Fascia 🗆	
CONTROL PANEL	TS 959 TS 971 TS971 automatically selected when safety edge chosen		LATH		95mm Galv 95mm Plastisol RAL		SAFETY	Wired Safety Edge ☐ Wireless Safety Edge ☐ Photocell ☐ Traffic Lights ☐		
FINISH	PPC Flags PPC Canopy PPC Fascia RAL		FITTING		Reveal Fit Left Reveal Fit Right Reveal Fit Inboard Motor Inboard Inboard Motor Inboard Inboard Motor Inboard Inbo		FIXING ANGLE	Reverse both angles Reverse left angles Reverse right angle		
ACTIVATION	Keyswitch Handheld Receiver Rocker Switch Push Button Induction Loop Radar Forklift transmitter		SPECIALS		Vision Windows □ No of Rows:		WICKET GATE	Left Hand Right Hand Frame in Frame out Deadlock Night Latch Push Pad Lever Handle external access device		
NOTES:										



Photograph the form, scan the QR code to send it directly to Alliance.