


Series 11FM Roller Shutter



Giving our customers piece of mind: Performance
characteristics according to harmonised standards EN13241:2003 + A2: 2016

CUSTOMER NAME:		CUSTOMER ADDRESS	
DATE		POSTCODE	
CONTACT NUMBER:		CONTACT NAME:	
E-MAIL:		SITE REFERENCE:	

Face Fit below 6000mm wide:

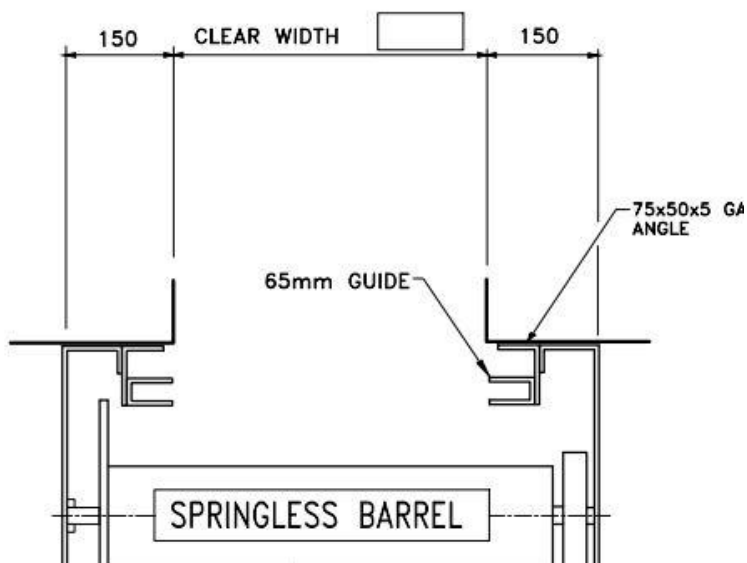

Reveal Fit:

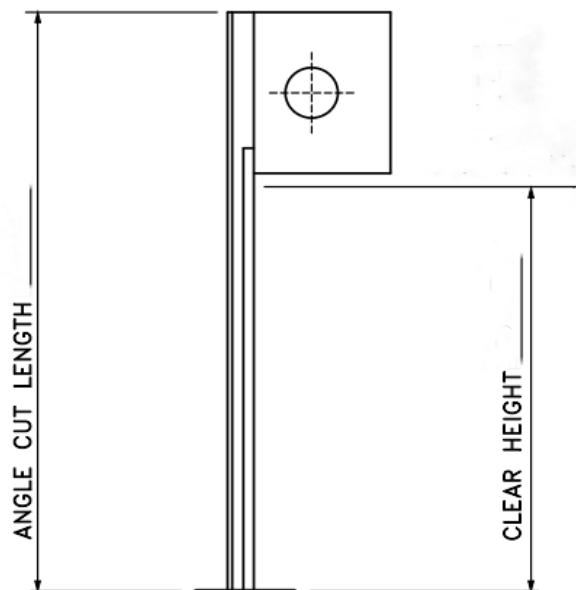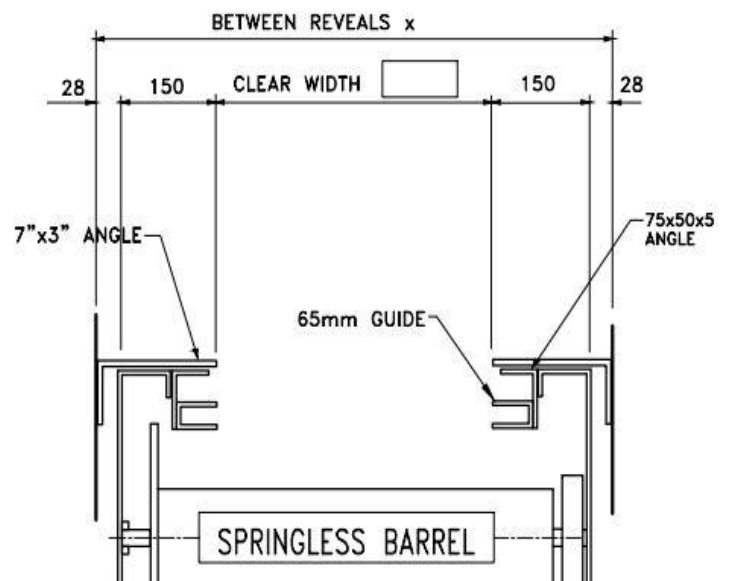

Measurements:

Back of Guide:

Back of Angles:

Side Room Available:

Left hand side:

Right hand side:

What is the expected cycles per hour?

MOTOR	Left Hand ☐ 1ph ☐ Right Hand ☐ 3ph ☐	FIXING POSITION		Internal fix ☐ External Fix ☐		
PLANT REQUIRED	Scaffold 5m ☐ Scissor Lift ☐ Cherry Picker ☐ Generator ☐ Weder ☐ Genie Lift ☐ Chain Hoist ☐ Harness ☐ Puller ☐ Breaker ☐ Mixer ☐ Jig Saw ☐ Floor Cutter ☐ Special ☐					
SPECIAL REQUIREMENTS	Is sliding room available: Yes ☐ No ☐					
CANOPY STYLE	Standard ☐ 	L-Shaped Out ☐ 	No Top Lip ☐ 	Top Lip Down ☐ 	L-Shaped In ☐ 	Fascia ☐ 
Motor Cover ☐						

SECURITY	Bullet Locks ☐ Ground Locks ☐ Lockable Key switch Box ☐ Bullet Lock Interlock ☐ Ground Lock Interlock ☐	LATH	Solid ☐ Plastisol ☐ Perforated ☐ Punched ☐ Tube & Link ☐	SAFETY	Wired Safety Edge ☐ Wireless Safety Edge ☐ Photocell ☐ Traffic Lights ☐
CONTROLS	TS 959 ☐ TS 971 ☐	BOTTOM RAIL & ANGLE	T-Rail (standard) ☐ L-Rail ☐	FIXING ANGLES	Reverse both angles ☐ Reverse left angles ☐ Reverse right angle ☐
FITTING	Reveal fit left face fix right ☐ Reveal fit right face fix left ☐				
ACTIVATION	Keyswitch ☐ Handheld Transmitter ☐ Rocker Switch ☐ Push Button ☐ Induction Loop ☐ Radar ☐ Forklift transmitter ☐	FINISH	Galv ☐ PPC Full shutter ☐ Plastisol ☐ PPC Flags ☐ PPC Canopy ☐ PPC Fascia ☐ RAL.....	SPECIALS	65mm straight guide ☐ 65 mm wind guide ☐ 100mm straight guide ☐ 100mm wind guide ☐ 18 SWG Curtain ☐ 20 SWG Curtain ☐ Reverse Coil ☐
OPTIONS	Battery Back Up ☐ Lockable Key switch box ☐ Compensating Rail ☐ Gradient.....	SEALS	Bottom Seal ☐ Side Brush ☐ Top Brush ☐	WICKET GATE	Left Hand ☐ Right Hand ☐ Frame in ☐ Frame out ☐

Default guides supplied subject to width:

65mm Straight Guide up to 3999mm wide.

65mm Wind Guide over 4000mm wide.

100mm Wind guide over 5999mm wide.



Photograph the form, scan the QR code to send it directly to Alliance.

Notes: